

10/06/00

1c929 U.S. PTO

Please type a plus sign (+) inside this box ☒ Approved for use through 09/30/00. OMB 0651-0032 PTO/SB/05 (12/97)
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

TI-31698

First Named Inventor or Application Identifier

John G. McDonough

Title

**SYSTEM AND METHOD FOR SELECTING SAMPLE STREAMS IN
DIRECT SEQUENCE SPREAD SPECTRUM COMMUNICATIONS**

Express Mail Label No.

EL213565179US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages **31**]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC d113) [Total Sheets **10**]
4. Oath or Declaration [Total Pages **1**]
a. ☒ Newly Executed (original or copy)
b. ☐ Copy from a prior application (37 CFR §1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application,
see 37 CFR §1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4b, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identical of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & Documents(s))
9. ☐ 37 CFR §3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ 2 Return Receipt Postcards (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
(PTO/SB/09-12) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
if foreign priority is claimed
16. ☒ Other: Check # **456559**
for \$**952.00**

*A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation

☐ Divisional

☐ Continuation-in-part (CIP)

of prior application No: /

Prior application information: Examiner

Group / Art Unit:

18. CORRESPONDENCE ADDRESS



Customer Number or Bar Code Label



Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	Ronald O. Neerings Texas Instruments Incorporated		
ADDRESS	Mail Station 3999 P. O. Box 655474		
CITY	Dallas	STATE	TX
COUNTRY	U.S.A.	TELEPHONE	(972) 917-
		ZIP CODE	75265
		FAX	(972) 917-4418

Name (Print/Type)	Terrance A. Meador	Registration No. (Attorney/Agent)	30,298
Signature	Terrance A. Meador		Date 6 October 2000

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL

Patent fees are subject to annual revision on October 1.

These are the fees effective October 1, 1997

Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB-09-12.**Complete if Known**

Application Number	To be assigned
Filing Date	Herewith
First Named Inventor	John G. McDonough
Examiner Name	Unknown
Group / Art Unit	Unknown
Attorney Docket No.	TI-31698/DOT1200

TOTAL AMOUNT OF PAYMENT (\$)**952.00****METHOD OF PAYMENT**

- 1.
- ☒
- The Commissioner is hereby authorized to charge to the following Deposit Account,

Deposit Account Number

07-1895

Deposit Account Name

Gray Cary Ware & Freidenrich

- ☒
- Charge any additional fee required or credit any overpayment
- ☐
- Charge all indicated fees and any additional fee required or credit any overpayment

- 2.
- ☒
- Payment Enclosed:**

☒ Check
 ☐ Money Order
 ☐ Other
FEE CALCULATION**1. BASIC FILING FEE**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	790	201	395	Utility filing fee	\$710
106	330	206	165	Design filing fee	\$
107	540	207	270	Plant filing fee	\$
108	790	208	395	Reissue filing fee	\$
114	150	214	75	Provisional filing fee	\$
SUBTOTAL (1)					(\$710)

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
29	-20** = 9	18	162
Independent Claims	4	-3** = 1	80
Multiple Dependent		0	0

**or number previously paid, if greater; For Reissue, see below

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	22	203	11	Claims in excess of 20
102	82	202	41	Independent Claims in excess of 3
104	270	204	135	Multiple dependent claims in excess of 3
109	82	209	41	**Reissue independent claims over original patent
110	22	210	11	**Reissue claims in excess of 20 and over original patent
SUBTOTAL (2)				

(\$242)

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	400	216	200	Extension of time within second month	
117	950	217	475	Extension of time within third month	
118	1,510	218	755	Extension of time within fourth month	
128	2,060	228	1,030	Extension of time within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,320	241	660	Petition to revive - unintentional	
142	1,320	242	660	Utility issue fee (or reissue)	
143	450	243	225	Design issue fee	
144	670	244	335	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt.	
581	40	581	40	Recording each patent assignment per property (time number of properties)	
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	
149	790	249	395	For each additional invention to be	

Other fee (specify)

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)**SUBMITTED BY**

Typed or Printed Name

TERRANCE A. MEADOR

Signature

Terrance A. Meador 6 October 2000

Date

Complete (if applicable)

Reg. Number

30,298

Deposit Account User ID

**SYSTEM AND METHOD FOR
SELECTING SAMPLE STREAMS IN DIRECT
SEQUENCE SPREAD SPECTRUM COMMUNICATIONS**

5 **1. Background of the Invention**

The present invention relates generally to the field of direct sequence spread spectrum (DSSS) communications and, more particularly, to the selection of sample streams for despreading and demodulation in a code division multiple access (CDMA) RAKE receiver.

10 **2. Description of Related Art**

In spread spectrum communications, such as in CDMA systems, pseudorandom noise (PN) sequences are used to generate spread spectrum signals by increasing the bandwidth (i.e., spreading) of a baseband signal. A forward link waveform transmitted by the base station may be comprised of a pilot waveform and a data waveform. Both of the waveforms are received with the same relative phase and amplitude distortions introduced by the channel. The pilot waveform is an unmodulated PN sequence which aids in the demodulation process, as is well-known in the art as "pilot-aided demodulation." Conventional pilot-aided demodulation methods typically include the steps of (i) demodulating the pilot waveform, (ii) estimating the relative phase and amplitude of the pilot waveform, (iii) correcting the phase of the data waveform using the estimated phase of the pilot waveform, and (iv) adjusting the weight of data symbols used in maximal ratio combining in a RAKE receiver based on the estimated amplitude of the pilot waveform. Steps (iii) and (iv) above are performed as a "dot product" as is known in

the art. Conventionally, steps (i) through (iv) are performed in hardware. In some conventional methods, a controller having a central processing unit (CPU) and/or a digital signal processor (DSP) may perform some of the above-described steps.

5 Fig. 1 illustrates a conventional IS-95A or TIA/EIA-95-B forward link base station transmitter 10 (prior art). A pilot channel 12 is generated that has no data. That is, the data is predetermined to be all "0" bits. The pilot channel is modulated, or covered with a Walsh code from Walsh code generator 14 at 1.2288 Mcps (megachips per second). 64
10 orthogonal Walsh codes, each of 64 bits, are used in the IS-95A and TIA/EIA-95-B systems. Walsh code H_0 is used to modulate the pilot channel.

Also depicted is a traffic or paging channel, which shall be referred to herein as an information channel. Data is input at one of a
15 plurality of data rates from 9.6 kbps (kilobits per second) to 1.2 kbps. The data is encoded at encoder 16, at one bit per two code symbols, so that the output of the encoder 16 varies from 19.2 ksps (kilosymbols per second) to 2.4 ksps. Symbol repetition device 18 repeats the code symbols from 1 to 8
times to create a 19.2 ksps signal. Alternately stated, either 1, 2, 4, or 8
20 modulation symbols are created per code symbol. Then, the information channel is scrambled with a long code at the same 19.2 ksps rate. Other rates are described in the IS-2000 standard. The information channel is covered with a different Wash code from that used to cover the pilot channel, code H_T for example.

After being modulated with Walsh codes, each channel is spread with a common short code, or PN sequence. Each channel is split into I and Q channels, and spread with I and Q channel PN sequences. A 90 degree phase shift is introduced by multiplying the I channels with a sin function, while the Q channels are being multiplied with a corresponding cosine function. Then, the I and Q channels are summed into a QPSK channel. In the IS-95A and TIA/EIA-95-B standards, the same baseband symbols are assigned to both the I and Q channels. The combination of all the QPSK channels, including pilot, synchronization, paging, and traffic channels can be considered a composite waveform. This composite waveform is then up-converted in frequency (not shown) and transmitted.

Fig. 2 is a conventional IS-95A or TIA/EIA-95-B CDMA receiver (prior art). At the mobile station receiver 50 the transmitted signals are accepted as analog information, and converted into a digital I and Q sample stream at A/D 52. Conventionally, a multi-finger RAKE is used to variably delay and amplify multipath delays in the sample stream, so that degradation due to fading can be minimized. Three demodulating fingers, demodulating finger 1 (54), demodulating finger 2 (56), and demodulating finger 3 (58) all receive the same I and Q sample stream, which has been represented as a single line for simplicity. Each demodulating finger is assigned one of the sample stream multipath delays. PN codes and Walsh codes are generated with delays consistent with the multipath delays of the sample stream to be demodulated. The

sample stream from the multipaths is coherently combined in combiner 60 based on a maximal ratio combining (MRC) principle.

The IS-2000 standards propose, and future uses will include multiple information channels with a variety of symbol rates. A variety of symbol accumulation periods will be required in the process of demodulating these information channels. In IS-95A and TIA/EIA-95-B standard communications, a symbol is conventionally spread with 64 PN chips at the transmitter. At the receiver, the symbol is recovered by despreading, uncovering, and accumulating the symbol over a period of 64 PN chips. The accumulated symbol is called a soft symbol. Conventionally, the soft symbol is corrected with respect to phase and weighted with respect to amplitude after accumulation, using the pilot waveform as a phase and amplitude reference.

The receiver 50 may also receive a sample stream including signals from more than one base station. The base stations are precisely timed and synchronized using offsets of the PN spreading code. That is, the sample stream received from two different base stations has delays that are typically much larger than multipath delays. The receiver 50 has diversity characteristics which permit it to demodulate the sample stream from multiple base stations, for the purposes of a handoff for example.

In some conventional CDMA RAKE receivers, the outputs of multiple demodulating fingers are "hardwired" to combine the common information channels in a sample stream. The decision and data transfer operations of the individual finger channels are predetermined. Hardwiring reduces flexibility, as the finger channels of the demodulating

fingers must always be combined with the same partner finger channels. Thus, the number of information channels, the information channel order, and the information channels that can be combined across demodulating fingers are necessarily constricted when the finger channel outputs are

5 connected in a hardwired arrangement. Hardwiring does not permit partner finger channels to be used with different combiner channels. A conventional receiver with a fixed number of finger channels in each demodulating finger can only demodulate such a fixed number of IS-2000 standard information channels.

10 Alternately, the soft symbols output by the demodulating finger can be buffered and transferred, via a data bus, to a CPU or DSP for combining. This software combining approach provides flexibility, as potentially the finger channels can be combined in any variation. However, the CPU or DSP may not have enough bandwidth to accomodate

15 the speed of the hardware combining solutions, nor will such solutions prove power efficient.

It would be advantageous if a CDMA receiver could be designed to maximize flexibility, permitting demodulating fingers to be used to demodulate any sample stream, and the finger channels of the

20 demodulating finger to be used to demodulate any information channel in a sample stream.

It would be advantageous if a CDMA receiver could be designed to minimize the number of demodulating fingers required to demodulate information channels in many different sample streams. To

25 that end, it would be desirable if any demodulating finger could be

selected to demodulate information channels in any of the sample streams.

It would be advantageous if a CDMA receiver could be used to demodulate a plurality of sample streams, from a plurality of carrier signals. To that end, it would be useful if the demodulating fingers were able to independently demodulate sample streams received on different antennae.

SUMMARY OF THE INVENTION

Accordingly, a DSSS communications receiver and demodulating finger is provided, capable of demodulating information channels in a plurality of sample streams. The system includes a plurality of demodulating fingers, with each demodulating finger accepting the plurality of sample streams. Each demodulating finger is connected to a controller to accept sample stream selection commands. Each demodulating finger demodulates information channels in the selected sample stream, providing soft symbols to a combiner.

Preferably, each demodulating finger includes a multiplexer (MUX) to accept the plurality of sample streams. Sample stream selection commands to the MUX control the MUX input selection. Each MUX has an output to provide the selected sample stream. Each demodulating finger also includes a plurality of finger channels, with each finger channel being coupled to the MUX to accept the selected sample stream, after a despreading operation. Each finger channel also accepts an uncovering code to uncover an information channel in the selected sample

009007" 98943950

stream, providing soft symbols from the uncovered information channel. Preferably, the uncovering code is generated external to the demodulating finger, and provided so that each finger channel receives an uncovering code corresponding to the information channel to be demodulated.

5 As mentioned above, IS-2000 standard transmissions involve the use of three independent carrier frequencies, which are converted into three corresponding sample streams. The controller determines which sample stream is to be demodulated by each demodulating finger, and sends sample stream selections accordingly. The demodulating finger has
10 the flexibility to demodulate any of the sample streams. That is, any sample stream may be selected for demodulation. For example, in one aspect of the invention the controller may select a different demodulating fingers for each of the three sample streams. In another aspects, the same sample stream can be simultaneously demodulated by two, three, or more
15 demodulating fingers. This latter feature permits a receiver to demodulate a sample stream with more information channels than there are finger channels, so that information channels in the sample stream are demodulated between the combination of two or more demodulating fingers. Further, the independent selection feature permits the
20 demodulating fingers to be used for soft handoffs and multipath demodulation. More importantly, the independent selection feature permits arbitrary demodulating finger and finger channel assignments for each sample stream.

A method is also provided for demodulating information
25 channels in a plurality of sample streams, derived from corresponding

carrier frequencies. The method comprises accepting a plurality of sample streams; selecting a sample stream from among the plurality of sample streams; and, providing soft symbols from the selected sample steam. Each sample stream includes a plurality of information channels, so that
 5 providing soft symbols includes providing soft symbols from a plurality of demodulated information channels in the selected sample stream.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a conventional IS-95A or TIA/EIA-95-B
 10 forward link base station transmitter (prior art).

Fig. 2 is a conventional IS-95A or TIA/EIA-95-B CDMA receiver (prior art).

Fig. 3 is a schematic block diagram illustrating the present invention receiver.

15 Fig. 4 is a depiction of information channels transformed to corresponding carrier frequencies, sample streams, and soft symbols.

Fig. 5 is schematic block diagram detailing aspects of the receiver of Fig. 3.

20 Fig. 6 is a schematic block diagram illustrating the demodulating finger of the present invention.

Fig. 7 illustrates an example where three demodulating fingers each demodulate a different sample stream.

Fig. 8 illustrates an example where three demodulating fingers each demodulate the same sample stream.

009900T 98848960

Fig. 9 illustrates an example where the demodulating fingers A through C can be used to improve the demodulation of sample streams that have suffered degradation due to multipath.

Fig. 10 is a flowchart illustrating the present invention method for a DSSS communications receiver to demodulate information channels in a plurality of sample streams.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 3 is a schematic block diagram illustrating the present invention receiver 100. Receiver 100 has an antenna 102 to accept a plurality of carrier signals, including carrier signals A, B, and C, represented by reference designators 104, 106, and 108, respectively, where each carrier signal has a different frequency. For simplicity, these carrier signals will be referred to herein as carriers.

The carriers 104-108 are input into a 90 degree phase shift block 110, where the in-phase and quadrature-phase portions of the carrier signal are separated into I and Q channels. Carriers A, B, and C are output from the 90 degree phase shift block 110 and provided to the A/D converter 112, where they are converted into respective sample streams A, B, and C. The sample streams are provided to each of the demodulating fingers, including demodulating finger A (114), demodulating finger B (116), demodulating finger C (118), and demodulating finger n (120), where n can be any whole number. In a preferred aspect of the invention, $n = 6$. As shown, the data lines

connecting the A/D converter 112 and the demodulating fingers 114-120 actually represent a plurality of sample streams, each having I and Q channels. Fig. 3 depicts three carriers (A, B, and C) and corresponding sample streams A, B, and C. However, the present invention is not
5 limited to any particular number of carriers or sample streams.

Fig. 4 is a depiction of information channels transformed to corresponding carrier frequencies, sample streams, and soft symbols. Carrier A (104) (see Fig. 3) includes a plurality of modulated information channels, as depicted in the modulation process described above in the explanation of Fig. 1. Information channels 1, 2, up to n , are shown,
10 where n can be any whole number. Typically, the information channels are traffic (voice and data) or paging channels, but they can also be synchronization or control channels. Carrier A is converted to sample stream A at the output of A/D converter 112 (see Fig. 3). Likewise, each
15 carrier, or sample stream includes a plurality of information channels. Carrier B (sample stream B) includes information channels 1_0 , 2_0 , up to n_0 , and carrier C (sample stream C) includes information channels 1_1 , 2_1 , up to n_1 . As explained in more detail below, the demodulating fingers perform operations to despread and uncover the information channels to
20 recover the soft symbols as is well known in the art. It should be understood that the operation of demodulation, as used herein, includes the operations of despreading, uncovering, accumulating, and pilot symbol dot product operations. It should also be understood that the various carriers and sample streams may include common information channels.
25 That is, information channel 1 in sample stream A may be the same as

information channels 10 in sample stream B and information channels 11 in sample stream C. However, in some aspects of the invention, information channels from each sample stream may be combined into a common stream of soft symbols. Returning briefly to Fig. 1, the soft symbols at the output of the demodulating fingers are related to the coded data bits at the output of encoder 16. Although only three carriers (sample streams) are shown, the present invention is not limited to any particular number of carriers (sample streams).

Fig. 5 is a schematic block diagram detailing aspects of the receiver 100 of Fig. 3. Sample streams A, B, and C are depicted, with the I and Q channels being shown as a common data line for simplicity. Each of the carriers has an independent output from a separate 90 degree phase shift block, where carrier A is output from 90 degree block 110a, carrier B is output from 90 degree block 110b, and carrier C is output from 90 degree block 110c. Likewise, each of the sample streams has an independent output from a separate A/D converter, where sample stream A is output from A/D 112a, sample stream B is output from A/D 112b, and sample stream C is output from A/D 112c. Each of the demodulating fingers 114-120 has a sample stream input to receive the plurality of sample streams. As shown, sample streams A, B, and C are received by the demodulating fingers 114-120.

A controller 122 is shown having an output connected to a sample stream selection input of each of the demodulating fingers 114-120. The controller 122 supplies commands to each demodulating finger that select the sample stream to be demodulated. That is, each

demodulating finger selects a sample stream from the plurality of sample streams in response to sample stream selection commands from the controller 122. In response to the sample stream selection commands, each demodulating finger provides soft symbols from the selected sample stream to a combiner (not shown).

To demodulate the selected sample stream, each demodulating finger must essentially reverse the spreading and covering process described in the explanation of Fig. 1. Therefore, a PN sequence, one for each of the I and Q channels of the selected sample stream, is required. A distinct Walsh code is also required to uncover each of the information channels in the selected sample stream. It should be understood that a Walsh code, as used herein, is equivalent to an uncovering code. In some aspects of the invention, each demodulating finger generates the PN and Walsh codes needed for its despreading and uncovering operations. Alternately, some or all of these operations can be performed outside the demodulating finger. In the preferred aspect of the invention, a code generator block 126 supplies the PN and Walsh codes to each of the demodulating fingers 114-120.

Fig. 6 is a schematic block diagram illustrating the demodulating finger of the present invention. Specifically, demodulating finger A (114) is depicted, however, demodulating finger 114 is representative of the other demodulating fingers 114-120. The three sample streams are received at the sample stream input. A sample stream selection input receives sample stream selection commands, and a

code input receives the PN and Walsh codes required for the despreading and uncovering operations.

A MUX 200 has a plurality of sample stream inputs connected to the demodulating finger sample stream input. As shown, MUX 200 has three sample stream inputs corresponding to the three sample streams. MUX 200 also has a sample stream selection input connected to the demodulating finger sample stream selection input to accept commands from the controller 122 (not shown). Once again it should be noted that the MUX 200 is not limited to any particular number of inputs or sample streams. The MUX 200 selects a sample stream in response to the selection commands and provides the selected sample stream at an output. For simplicity, the I and Q channels of the sample streams are represented with a single data line.

The output of MUX 200 is connected to a despreading unit 202 which has an input to accept the I and Q channels of the selected sample stream. Despreading unit 202 also has a input, connected to the demodulating finger code input, to accept the PN sequence used to despread the selected sample stream. As explained above, separate I and Q PN sequences are required. The despread sample stream output from despreading unit 202 is supplied to the sample stream input of a plurality of finger channels. Specifically, the sample streams are supplied to a plurality of uncovering units 204-208 associated with finger channels 210-214, respectively. Finger channels 210-214, with uncovering units 204-208, are depicted, but the invention is not limited to any particular number of finger channels. Each of the uncovering units 204-208 accepts

a Walsh code from the demodulating finger code input, and ultimately, from the code generator 126 (see Fig. 5).

For example, sample stream A is selected for demodulation by demodulating finger A (114). Referring briefly to Fig. 4, it can be seen that sample stream A includes at least three information channels (1, 2, and n). Each of these information channels are covered in the transmitter with a Walsh code. For example, Walsh code H1 is used to cover information channel 1, Walsh code H2 is used to cover information channel 2, and Walsh code H n is used to cover information channel n .

Returning to Fig. 6, Walsh code H1 is supplied to uncovering unit 204 to uncover information channel 1, Walsh code H2 is supplied to uncovering unit 206 to uncover information channel 2, and Walsh code H n is supplied to uncovering unit 208 to uncover information channel n .

The outputs of the uncovering units 204-208 are provided to respective accumulators 216-220 where the soft symbols are accumulated. The soft symbols are output by each finger channel 210-214, which are connected to the demodulating finger soft symbol output and, ultimately, to combiner 124 (see Fig. 3).

Fig. 7 illustrates an example where three demodulating fingers 114-118 each demodulate a different sample stream. The controller 122 (not shown) sends commands for demodulating finger A (114) to demodulate sample stream A. As a result, demodulating finger A (114) provides soft symbols from sample stream A at its soft symbol output. Likewise, the controller 122 (not shown) sends commands for demodulating finger B (116) to demodulate sample stream B and

demodulating finger C (118) to demodulate sample stream C. As a result, demodulating finger 116 provides soft symbols from sample stream B and demodulating finger 118 provides soft symbols from sample stream C at their respective soft symbol outputs. It is to be understood that there are
5 no predefined relationships between the demodulating fingers and the sample streams. In the above example, demodulating finger A (114) could have been selected to demodulate either sample stream B or C as an alternative to demodulating sample stream A. Further, more than three demodulating fingers can be used to demodulate a plurality of sample
10 streams, where each of the demodulating fingers operates on a selected sample stream from the plurality of sample streams.

Fig. 8 illustrates an example where three demodulating fingers 114-118 each demodulate the same sample stream. The controller 122 (not shown) sends commands for demodulating finger A (114) to
15 demodulate sample stream A. As a result, demodulating finger A (114) provides soft symbols from sample stream A at its soft symbol output. Likewise, the controller 122 (not shown) sends commands for demodulating finger B (116) to demodulate sample stream A and demodulating finger C (118) to demodulate sample stream A. As a result,
20 demodulating finger B (116) provides soft symbols from sample stream A, and demodulating finger C (118) provides soft symbols from sample stream A at their respective soft symbol outputs. Alternately, only two, or more than three, demodulating fingers can be selected to demodulate sample stream A. As another alternative, the demodulating fingers 114-
25 118 could all have been selected to demodulate sample steam B or C.

Fig. 9 illustrates an example where the demodulating fingers A (114) through C (118) can be used to improve the demodulation of sample streams that suffered degradation due to multipath. For example, carrier A (104) may be received with a plurality of multipath delays.

5 These multipath delays are converted into sample stream A having a plurality of sample stream delays. Each of the sample stream delays can be assigned to a different demodulating finger for demodulation. For example, a first delay of sample stream A can be demodulated at demodulating finger A (114), a second delay at demodulating finger B (116), and a third delay at demodulating finger C (118). The controller (not shown) of the present invention can assign each delay to a different demodulating finger, and the present invention is only limited by the total number of demodulating fingers in the receiver.

Fig. 10 is a flowchart illustrating the present invention method for a DSSS communications receiver to demodulate information channels in a plurality of sample streams. Although the method is presented as a sequence of numbered steps for clarity, no order should be inferred from the numbering unless explicitly stated. Step 300 is the start. Step 302 accepts a plurality of sample streams. Step 304 selects a sample stream from among the plurality of sample streams. Step 306 is a product, where soft symbols are provided from the selected sample steam.

In some aspects of the invention, the accepting of the plurality of sample streams in Step 302 includes each sample stream having an information channel, and the providing soft symbols in Step 306 includes providing soft symbols from a demodulated information

channel in the selected sample stream. The method includes Step 305a, which accepts a Walsh code. Then, Step 305b uncovers the information channel with the Walsh code. Typically, the accepting of the plurality of sample streams in Step 302 includes each sample stream having a plurality of information channels, and the providing the soft symbols in Step 306 includes providing soft symbols from a plurality of demodulated information channels in the selected sample stream.

In some aspects of the invention, the selecting of a sample stream in Step 304 includes selecting each sample stream from the plurality of sample streams, so that Step 306 provides soft symbols from each of the plurality of sample streams.

In some aspects of the invention, Step 300 starts with the inclusion of a demodulating finger. Then, the demodulating finger accepts the plurality of sample streams in Step 302. The demodulating finger accepts sample stream selection commands in Step 304, and provides the soft symbols from the selected sample stream in Step 306. In some aspects of the invention, a controller is included. Then, Step 304 includes the controller selecting the sample stream, and the demodulating finger accepting sample stream selection commands from the controller.

Typically, the receiver includes a plurality of demodulating fingers. Then, each demodulating finger accepts the plurality of sample streams in Step 302. The controller selects a sample stream for each demodulating finger in Step 304. Each demodulating finger accepts sample stream selection commands from the controller in Step 304, and provides the soft symbols from the selected sample stream in Step 306.

0368436.100000

Typically, the method includes further steps. Step 301a accepts a plurality of carriers. Step 301b converts each carrier from the plurality of carriers into a plurality of sample streams. Then, the accepting of a plurality of sample streams in Step 302 includes accepting a sample stream from each carrier in the plurality of carriers.

As an example, Step 300 could start with the inclusion of a first, second and third demodulating finger. The receiving a plurality of carriers in Step 301a includes receiving a first, second, and third carrier. The converting each carrier from the plurality of carriers in Step 301b includes converting the first carrier to a first sample stream, the second carrier to a second sample stream, and a third carrier to a third sample stream. The first, second, and third demodulating fingers accept the first, second, and third sample streams in Step 302, and the controller selects the first sample stream for the first demodulating finger, the second sample stream for the second demodulating finger, and the third sample stream for the third demodulating finger in Step 304.

As another example, Step 300 may start with the inclusion of a first and second demodulating finger. The receiving a plurality of carriers in Step 301a includes receiving a first, second, and third carrier. The converting of each carrier from the plurality of carriers in Step 301b includes converting the first carrier to a first sample stream, the second carrier to a second sample stream, and a third carrier to a third sample stream. The first and second demodulating fingers accept the first, second, and third sample streams in Step 302, and the controller selects

the first sample stream for the first demodulating finger and the first sample stream for the second demodulating finger in Step 304.

As yet another example, Step 300 could start with the inclusion of a first, second and third demodulating finger. The receiving a plurality of carriers in Step 301a includes receiving a first carrier with a plurality of multipath delays, including a first, second, and third delay. The converting each carrier from the plurality of carriers in Step 301b includes converting the first carrier with a plurality of delays into a first sample stream with a plurality of delays, including a first, second, and third delay. The first, second, and third demodulating fingers accept the first sample stream with the plurality of delays in Step 302, and the controller selects the first sample stream first delay for the first demodulating finger, the first sample stream second delay for the second demodulating finger, and the first sample stream third delay for the third demodulating finger in Step 304.

A receiver system and method have been presented above for the selection of a sample stream for demodulation, from among a plurality of sample streams. The invention has been described in the context of receiving a plurality of sample stream from a corresponding plurality of carriers, with the assumption that the carriers are transmitted from the same source. The invention is also applicable to the selection of a sample stream, however the sample streams are received. It is conceivable that the plurality of sample streams could include sample streams from different wireless sources or different antennae, to name but a few examples. The assumption has also been made in the above description of

09684886-100600

5

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

CLAIMS

What is claimed is:

1. In a direct sequence spread spectrum (DSSS) communications receiver, a system for demodulating information channels in a plurality of sample streams, the system comprising:
- a controller having an output to select a sample stream; and
- a plurality of demodulating fingers, each demodulating finger having a sample stream input to accept the plurality of sample streams, a selection input connected to the controller output to accept sample stream selection commands, and each demodulating finger demodulating information channels to provide soft symbols from the selected sample stream at a soft symbol output.
2. The system of claim 1 wherein each demodulating finger includes:
- a MUX having a first input connected to the demodulating finger sample stream input to accept the plurality of sample streams, a second input connected to the demodulating finger selection input to accept sample stream selection commands, and an output to provide the selected sample stream.
3. The system of claim 2 wherein each demodulating finger further includes:

a plurality of finger channels, wherein each finger channel includes a sample stream input connected to the MUX output to accept the selected sample stream, a code input to accept an uncovering code, each finger channel demodulating an information channel in the selected sample stream in response to the accepted uncovering code to provide soft symbols at a soft symbol output connected to the demodulating finger soft symbol output.

4. The system of claim 3 further comprising:
a code generator having an output to provide uncovering codes; and

wherein each demodulating finger further includes a code input connected to the code generator output to accept uncovering codes; and

wherein the code input of each finger channel is connected to the demodulating finger code input to accept uncovering codes.

5. The system of claim 1 in which the plurality of sample streams are converted from a plurality of accepted carriers; and

wherein each demodulating finger accepts sample streams converted from the plurality of carriers.

6. The system of claim 5 wherein the controller selects a sample stream for each of the demodulating fingers from the plurality of sample streams.

7. The system of claim 6 in which three sample streams are respectively converted from a first, second, and third carrier;

wherein the controller assigns a first sample stream, from
5 the first carrier, to a first demodulating finger from the plurality of demodulating fingers;

wherein the controller assigns a second sample stream, from the second carrier, to a second demodulating finger from the plurality of demodulating fingers; and

10 wherein the controller assigns a third sample stream, from the third carrier, to a third demodulating finger from the plurality of demodulating fingers.

8. The system of claim 6 in which three sample streams
15 are respectively converted from a first, second, and third carrier;

wherein the controller assigns a first sample stream, from the first carrier, to a first demodulating finger from the plurality of demodulating fingers; and

wherein the controller assigns the first sample stream, from
20 the first carrier, to a second demodulating finger from the plurality of demodulating fingers.

9. The system of claim 8 wherein the controller assigns the sample stream, from the first carrier, to a third demodulating finger
25 from the plurality of demodulating fingers.

09644536-100600
10. The system of claim in which a first carrier is received with a least a first and second multipath delay, and in which the first carrier first and second multipath delays are converted into a first sample stream with at least a first and second delay;

wherein the controller assigns the first sample stream first delay to a first demodulating finger from the plurality of demodulating fingers; and

wherein the controller assigns the first sample stream second delay to a second demodulating finger from the plurality of demodulating fingers.

11. In a direct sequence spread spectrum (DSSS) communications receiver, a demodulating finger for demodulating information channels in a plurality of sample streams, the demodulating finger comprising:

a sample stream input to accept the plurality of sample streams;

a selection input to accept sample stream selection commands; and

a soft symbol output to provide soft symbols from demodulated information channels in the selected sample stream.

12. The demodulating finger of claim 11 further comprising:

a MUX having a first input connected to the demodulating
finger sample stream input to accept the plurality of sample streams, a
second input connected to the demodulating finger selection input to
accept sample stream selection commands, and an output to provide the
5 selected sample stream.

13. The demodulating finger of claim 12 further
comprising:

a plurality of finger channels, wherein each finger channel
10 includes a sample stream input connected to the MUX output to accept
the selected sample stream, a code input to accept an uncovering code,
each finger channel demodulating an information channel in the selected
sample stream in response to the accepted uncovering code to provide soft
symbols at a soft symbol output connected to the demodulating finger soft
15 symbol output.

14. The demodulating finger of claim 13 wherein each
demodulating finger further includes:

a code input to accept a plurality of uncovering codes; and
20 wherein the code input of each finger channel is connected to
the demodulating finger code input to accept an uncovering code.

15. The demodulating finger of claim 11 in which the
plurality of sample streams correspond to a plurality of converted carriers;
25 and

wherein the demodulating finger accepts the plurality of sample streams converted from the plurality of carriers.

16. The demodulating finger of claim 15 in which a first,
5 second, and third sample stream are respectively converted from a first, second, and third carrier;

wherein the demodulating finger accepts commands for the selection of a sample stream from the group including first, second, and third sample streams.

10

17. In a direct sequence spread spectrum (DSSS) communications receiver, a method for demodulating information channels in a plurality of sample streams, the method comprising:
accepting a plurality of sample streams;
15 selecting a sample stream from among the plurality of sample streams; and
providing soft symbols from the selected sample steam.

18. The method of claim 17 wherein accepting the
20 plurality of sample streams includes each sample stream having an information channel; and

wherein providing soft symbols includes providing soft symbols from an uncovered information channel in the selected sample stream.

25

19. The method of claim 18 further comprising:
uncovering the information channel with a Walsh code.

20. The method of claim 19 further comprising:
5 preceding the uncovering of the information channel with the
Walsh code, accepting the Walsh code.

21. The method of claim 18 wherein accepting the
plurality of sample streams includes each sample stream having a
10 plurality of information channels; and
wherein providing the soft symbols includes providing soft
symbols from a plurality of demodulated information channels in the
selected sample stream.

22. The method of claim 17 wherein selecting a sample
15 stream includes selecting each sample stream from the plurality of sample
streams; and

wherein providing soft symbols from the selected sample
stream includes providing soft symbols from each of the plurality of
20 sample streams.

23. The method of claim 17 in which a demodulating
finger is included; and
wherein the demodulating finger accepts the plurality of
25 sample streams;

wherein the demodulating finger provides the soft symbols from the selected sample stream.

24. The method of claim 23 in which a controller is included, and the method further comprising:

wherein the demodulating finger accepts sample stream selection commands from the controller.

wherein each demodulating finger accepts the plurality of sample streams;

wherein each demodulating finger accepts sample stream selection commands from the controller; and

26. The method of claim 25 further comprising:
receiving a plurality of carriers; and

wherein the first and second demodulating fingers accept the first, second, and third sample streams; and

wherein the controller selects the first sample stream for the first demodulating finger and the first sample stream for the second
5 demodulating finger.

29. The method of claim 25 in which a first, second, and third demodulating finger are included;

wherein receiving a plurality of carriers includes receiving a
10 first carrier with a plurality of multipath delays, including a first, second, and third delay;

wherein converting each carrier from the plurality of carriers includes converting the first carrier with the plurality of delays to a first sample stream with a plurality of delays, including a first, second, and
15 third delay;

wherein the first, second, and third demodulating fingers accept the first sample stream with the plurality of delays; and

wherein the controller selects the first sample stream first delay for the first demodulating finger, the first sample stream second
20 delay for the second demodulating finger, and the first sample stream third delay for the third demodulating finger.

5

10

15

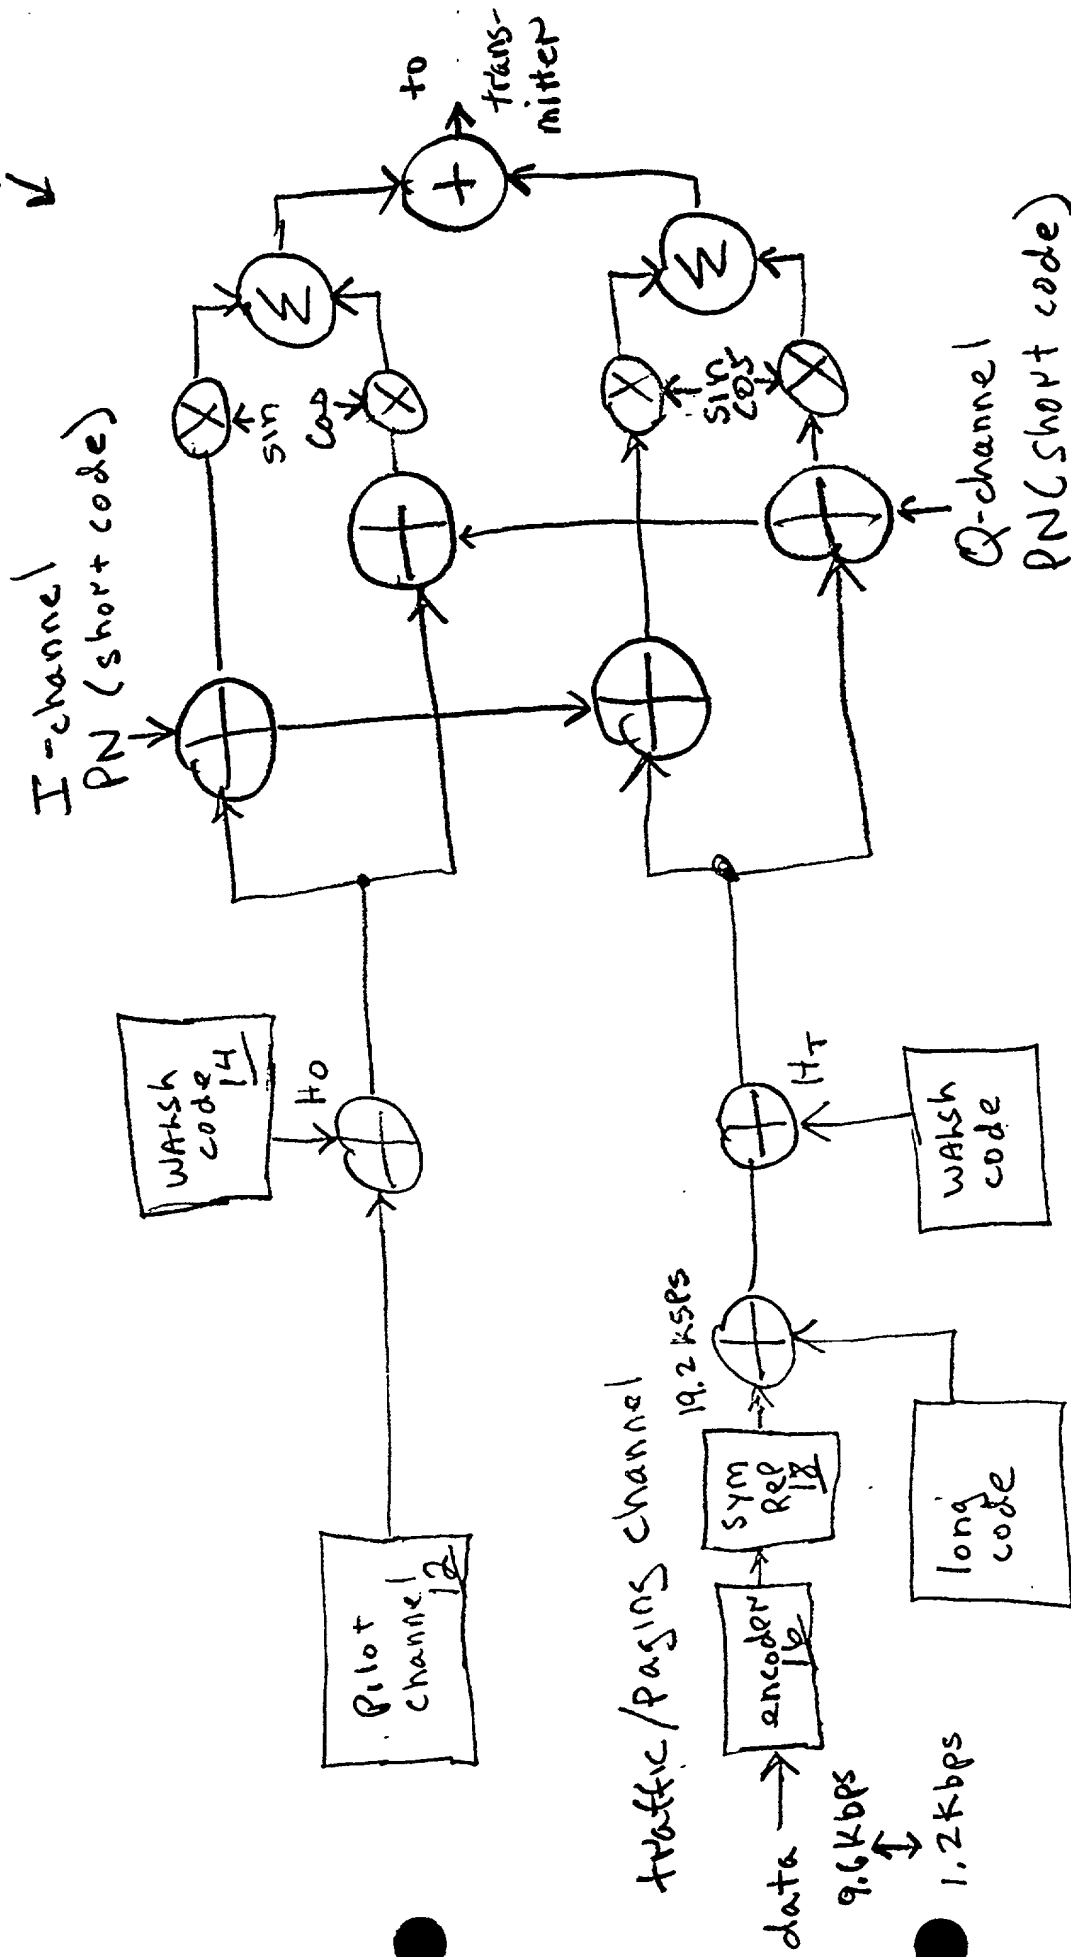


Fig. 1 (prior art)

50
↓

00500T 98348960

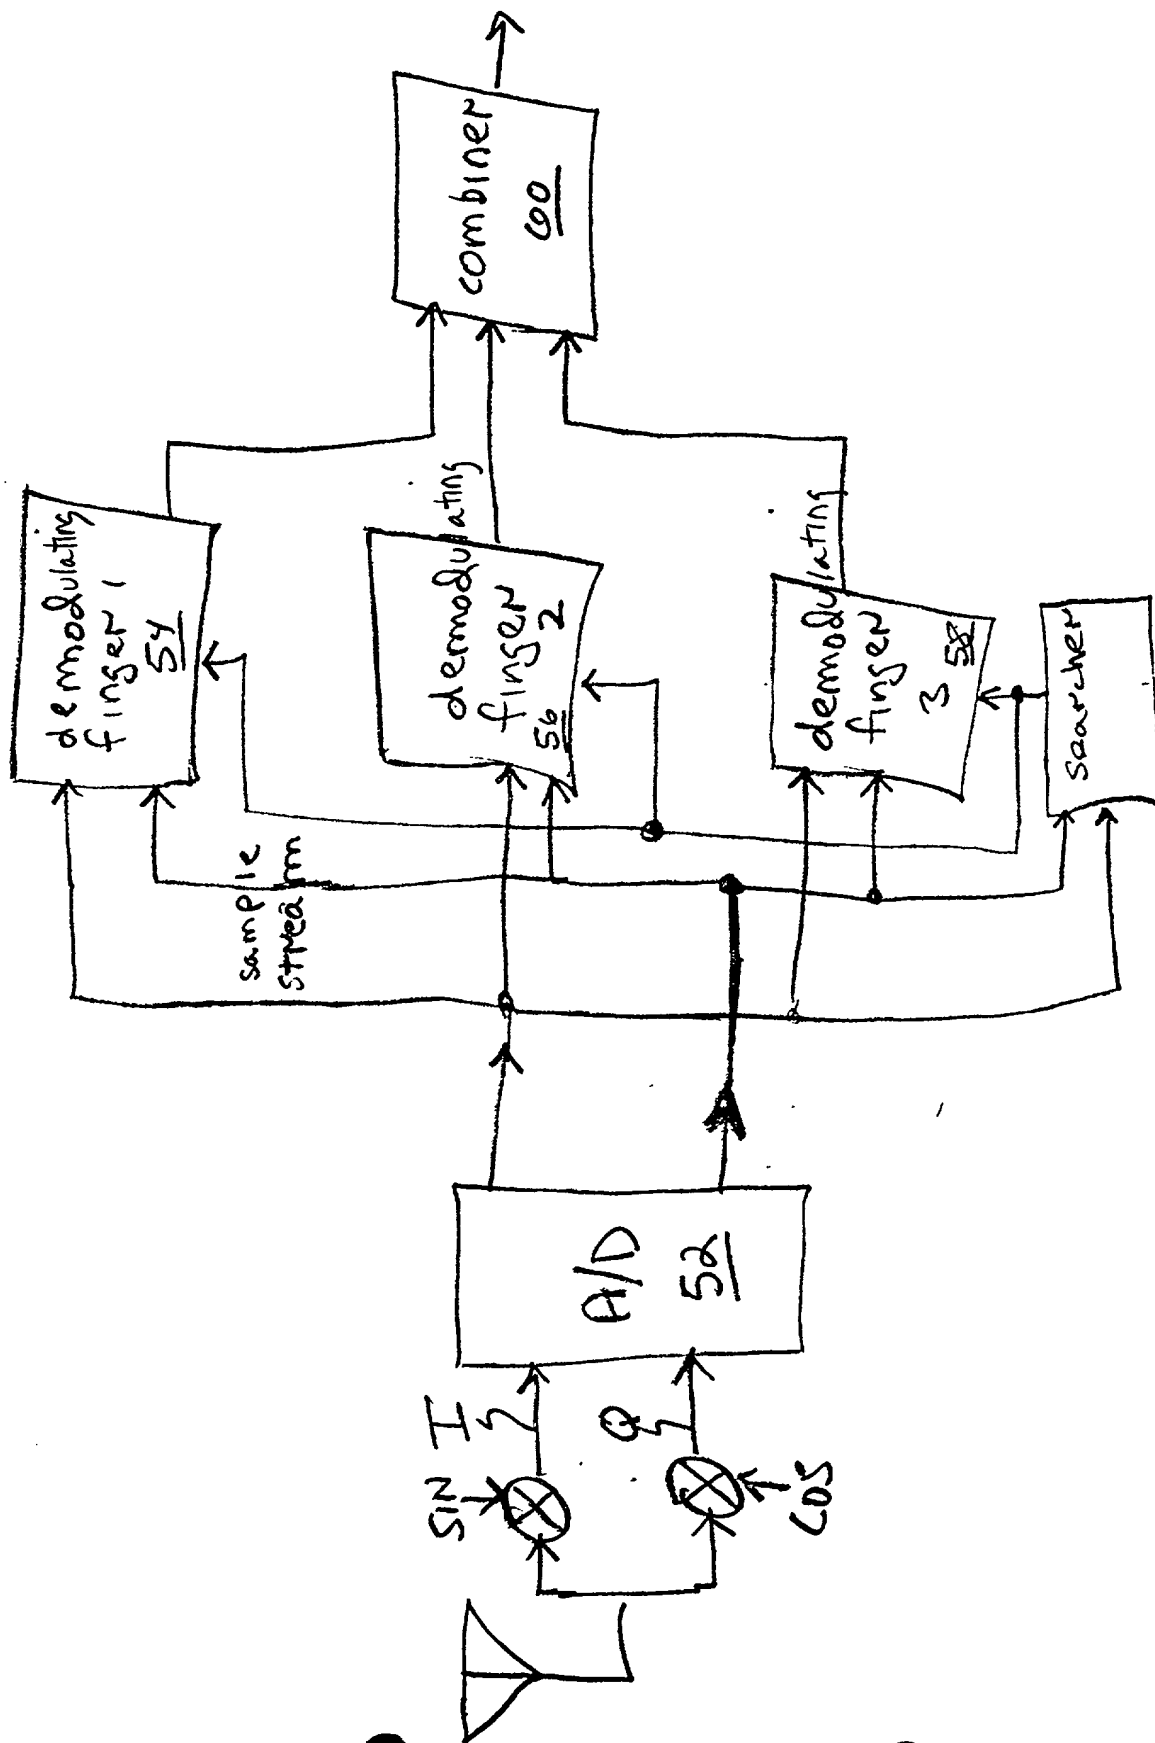


Fig. 2 (prior art)

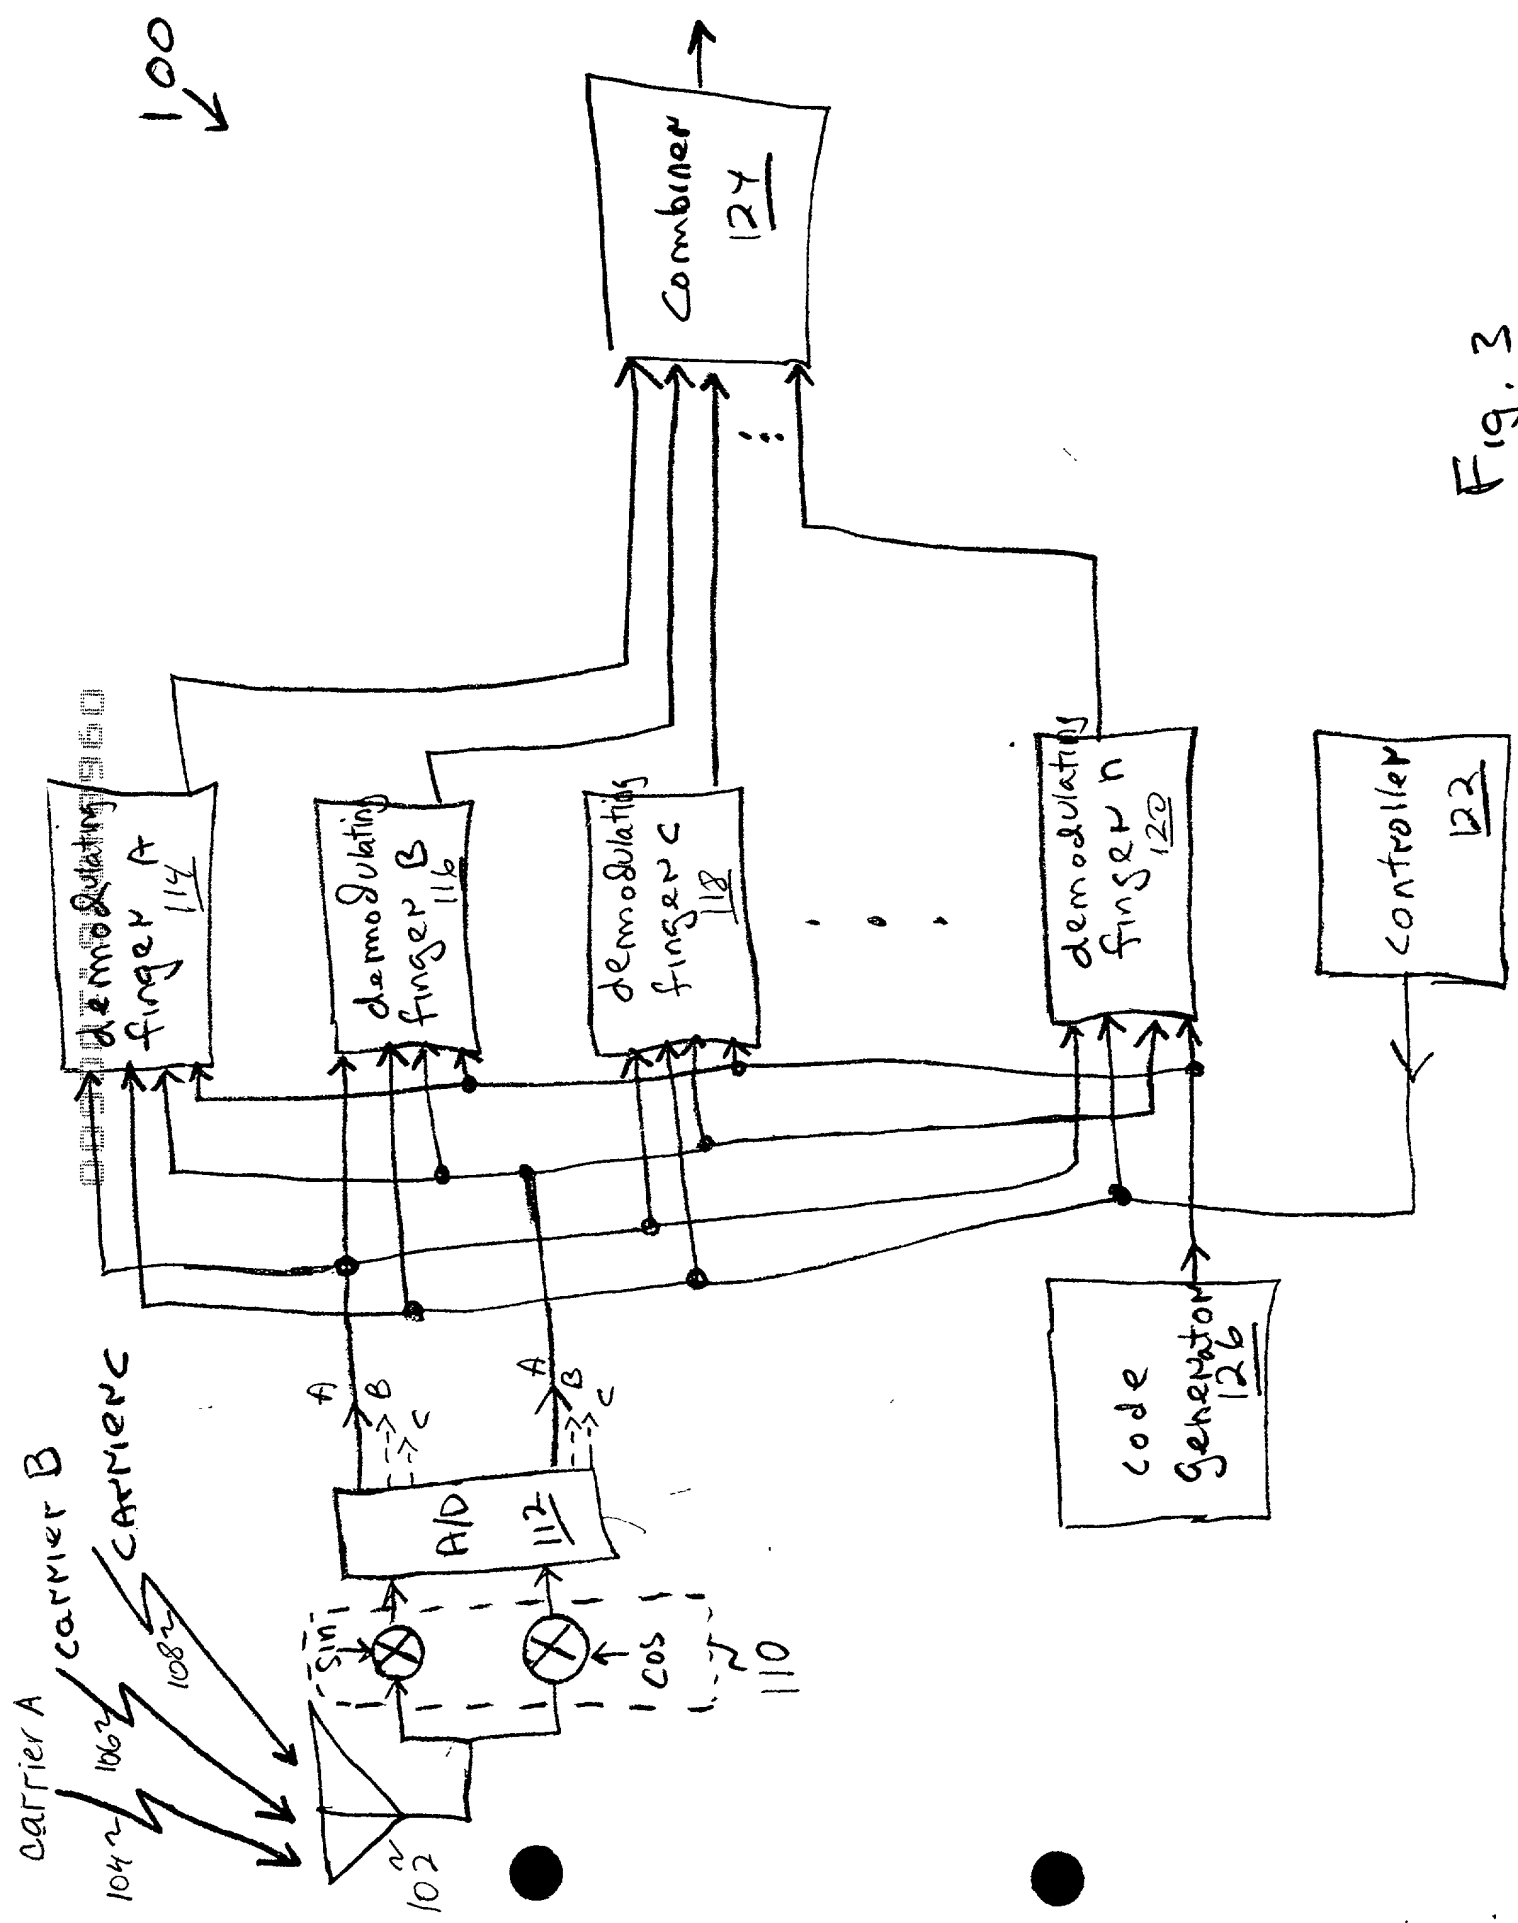


Fig. 3

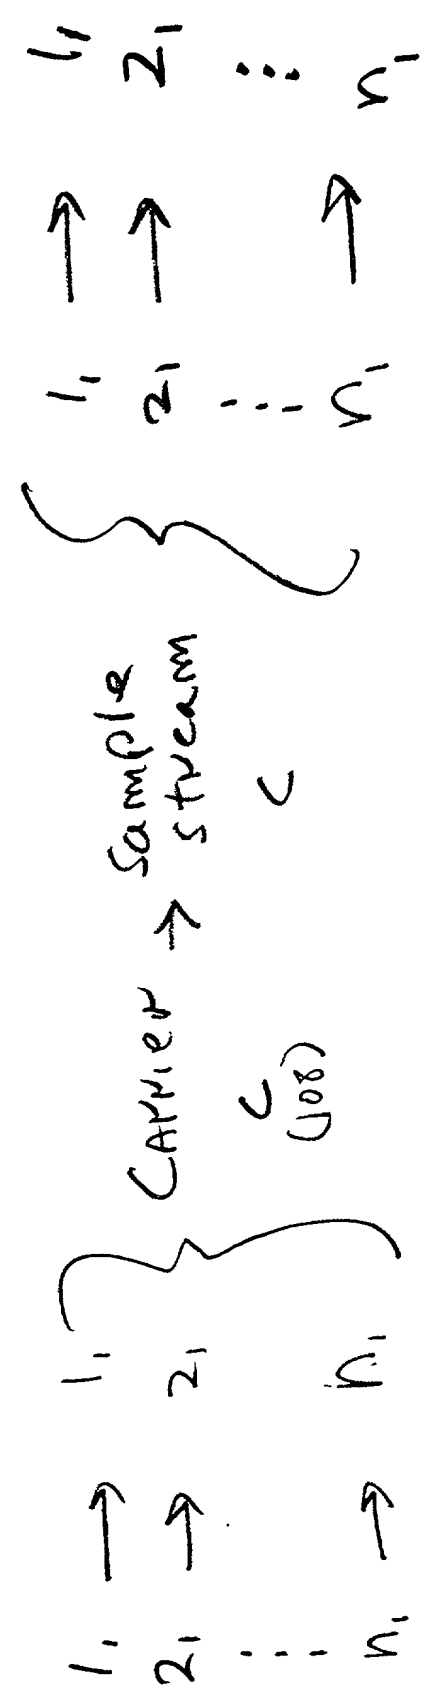
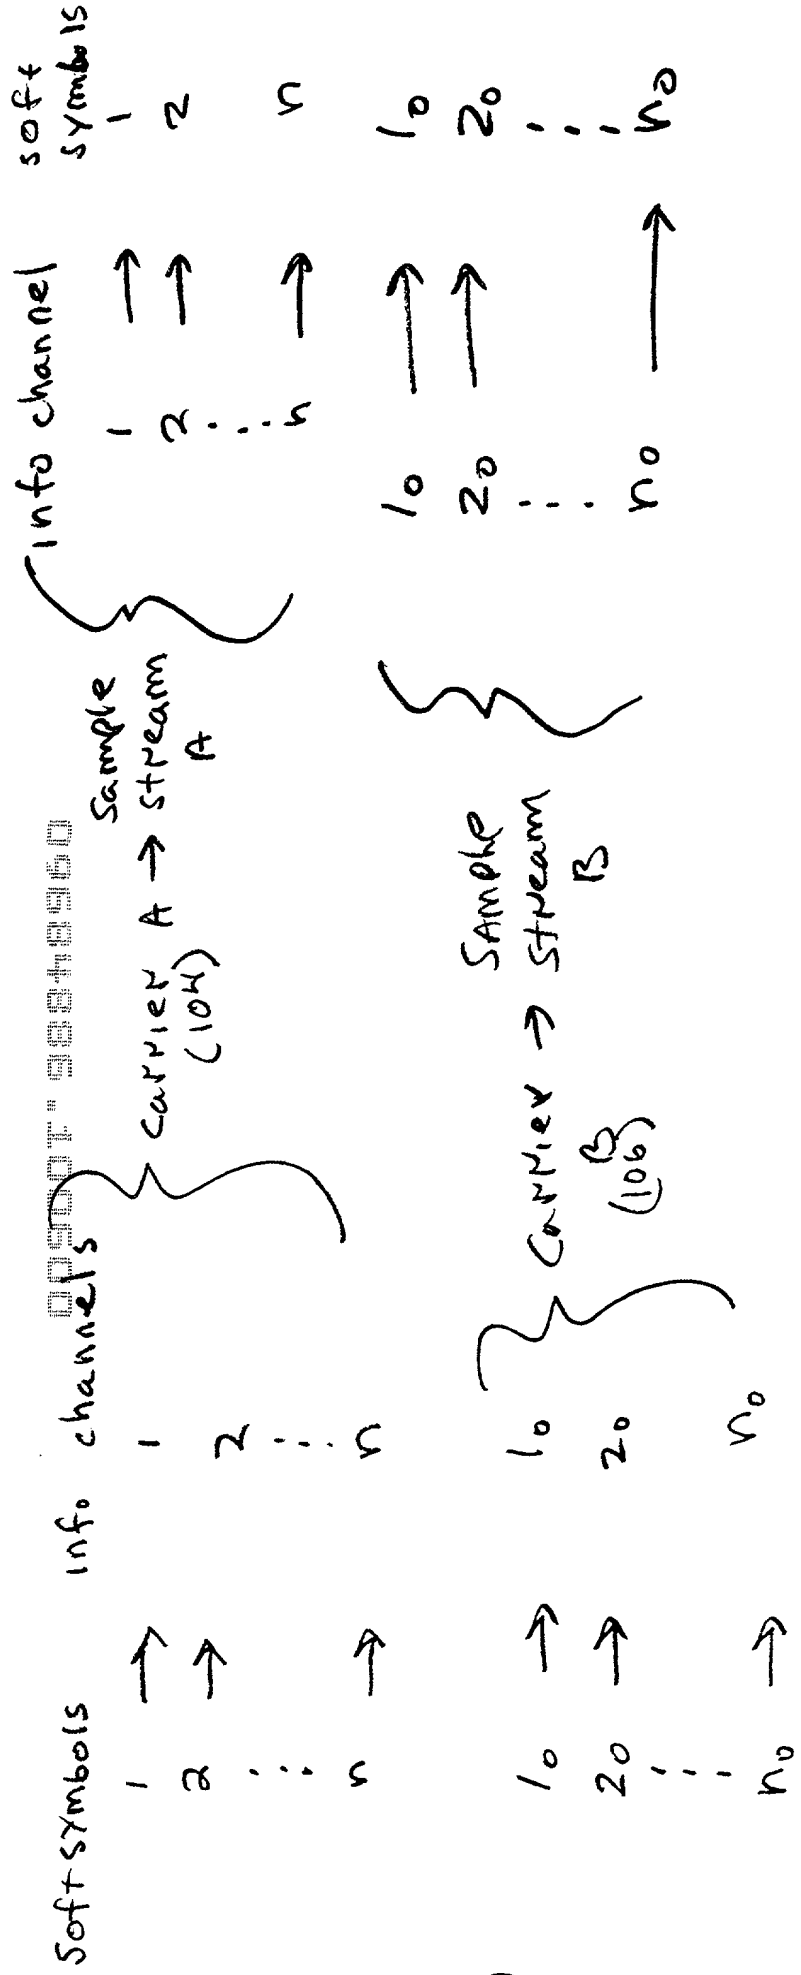


Fig 4

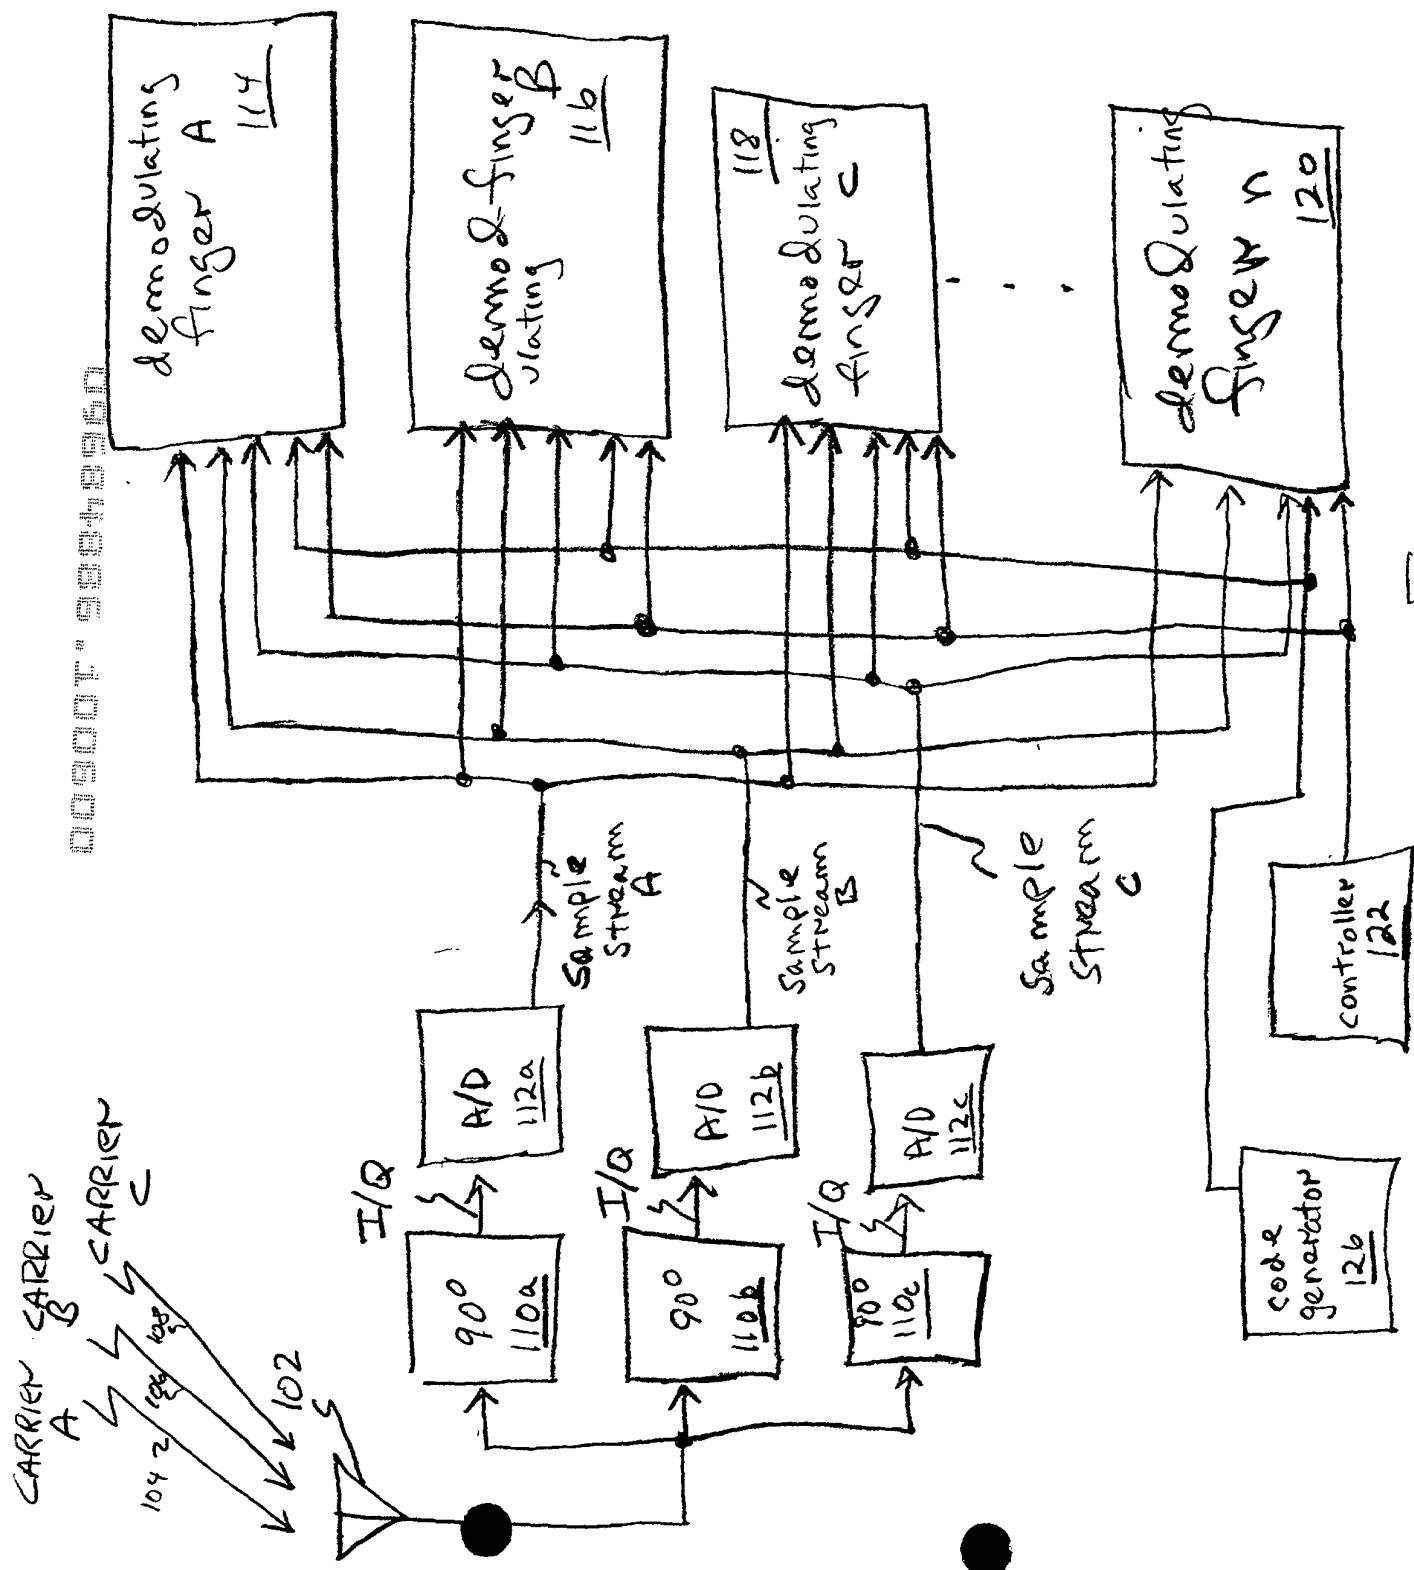


Fig. 5

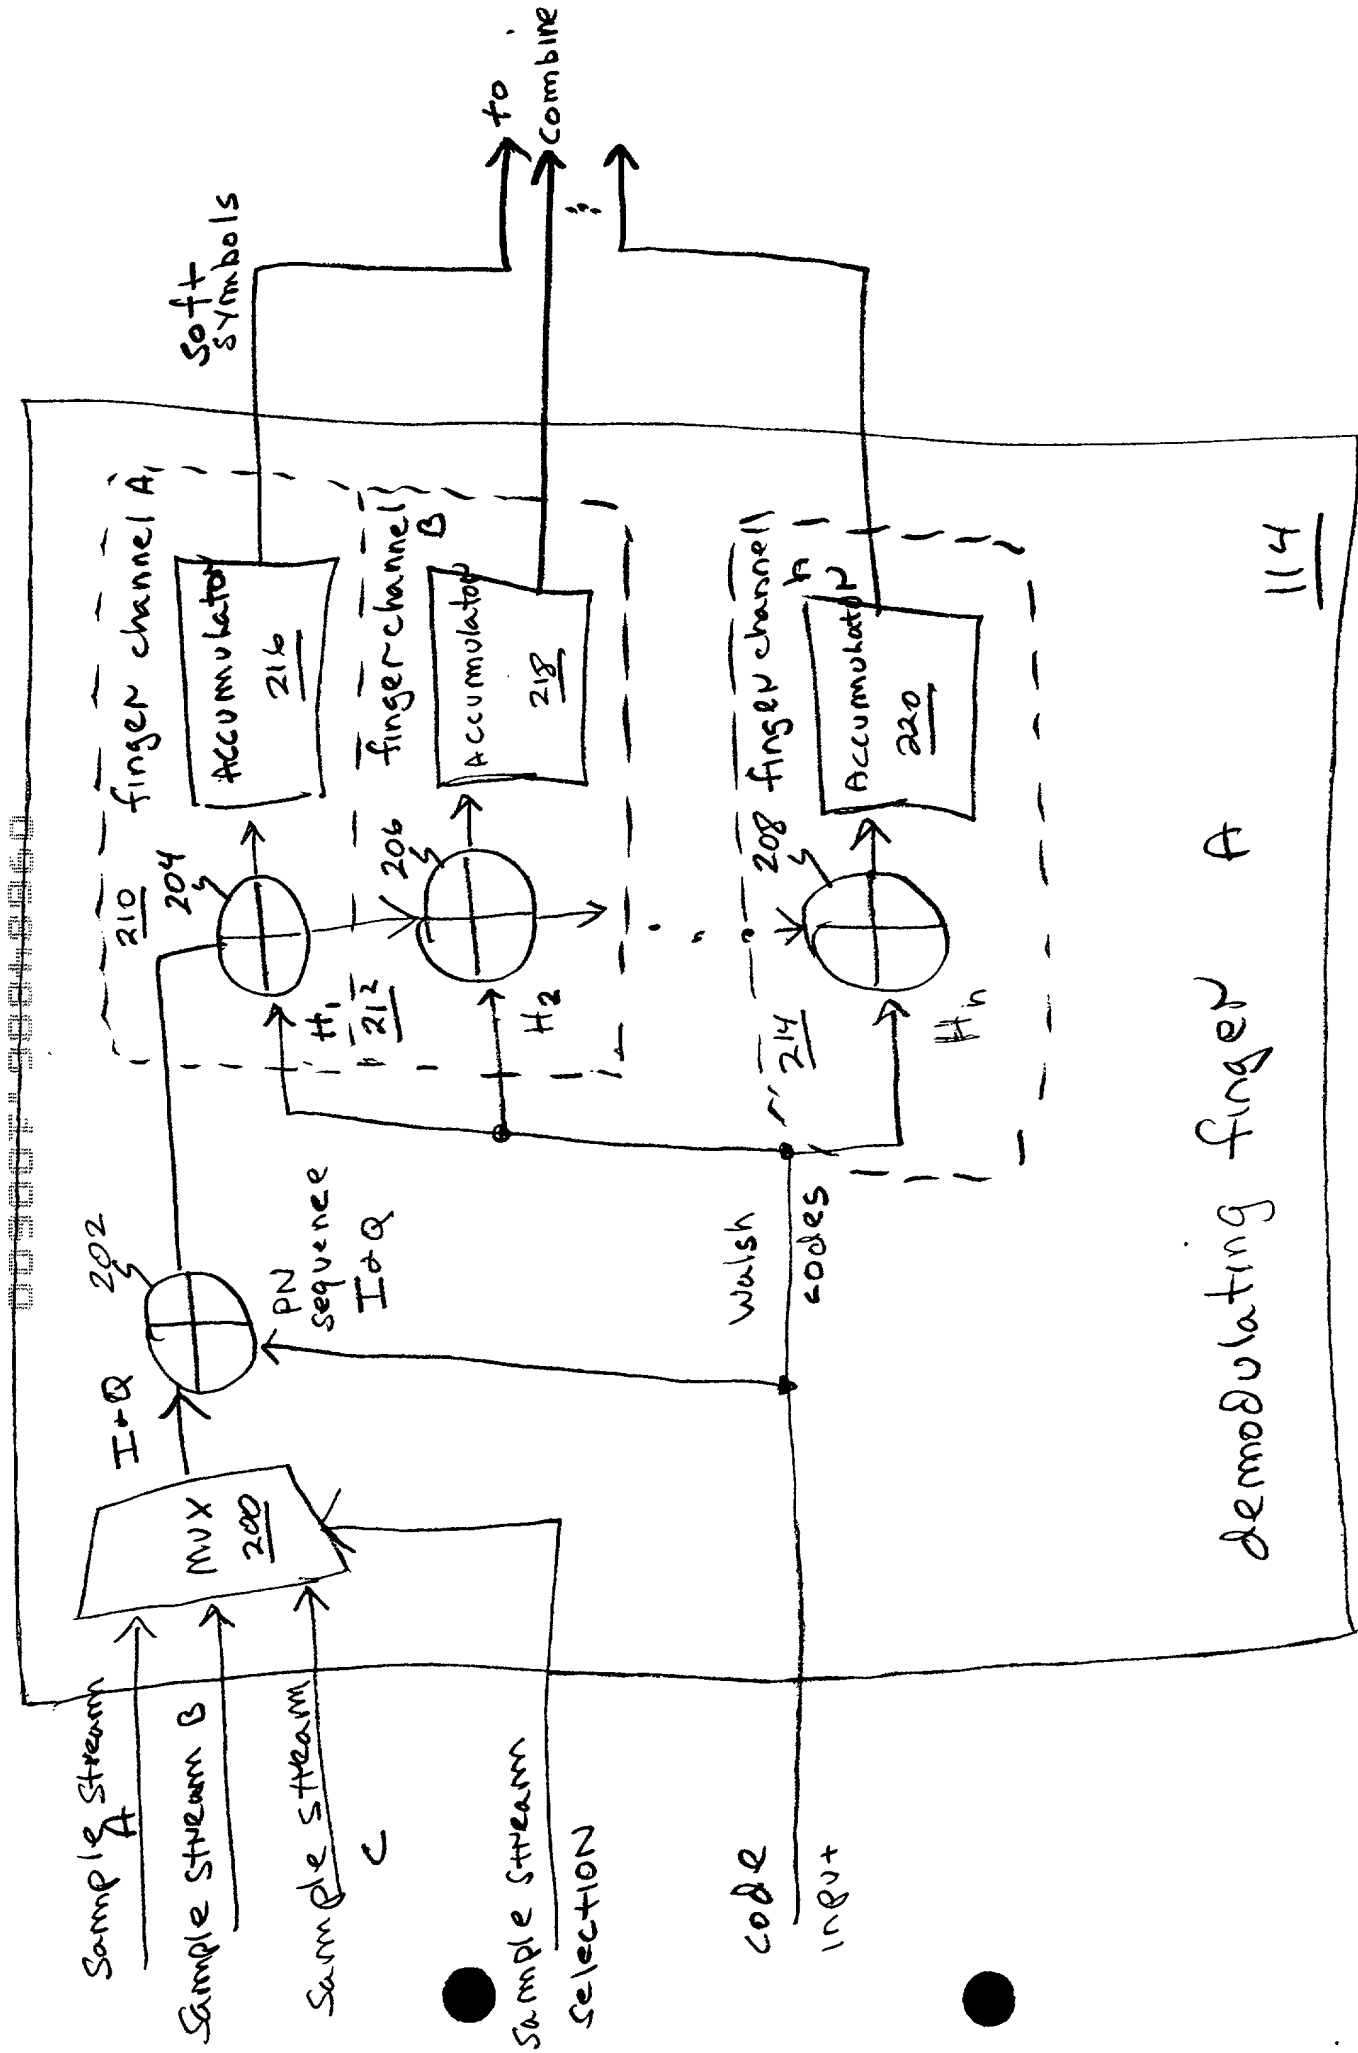


Fig. 6

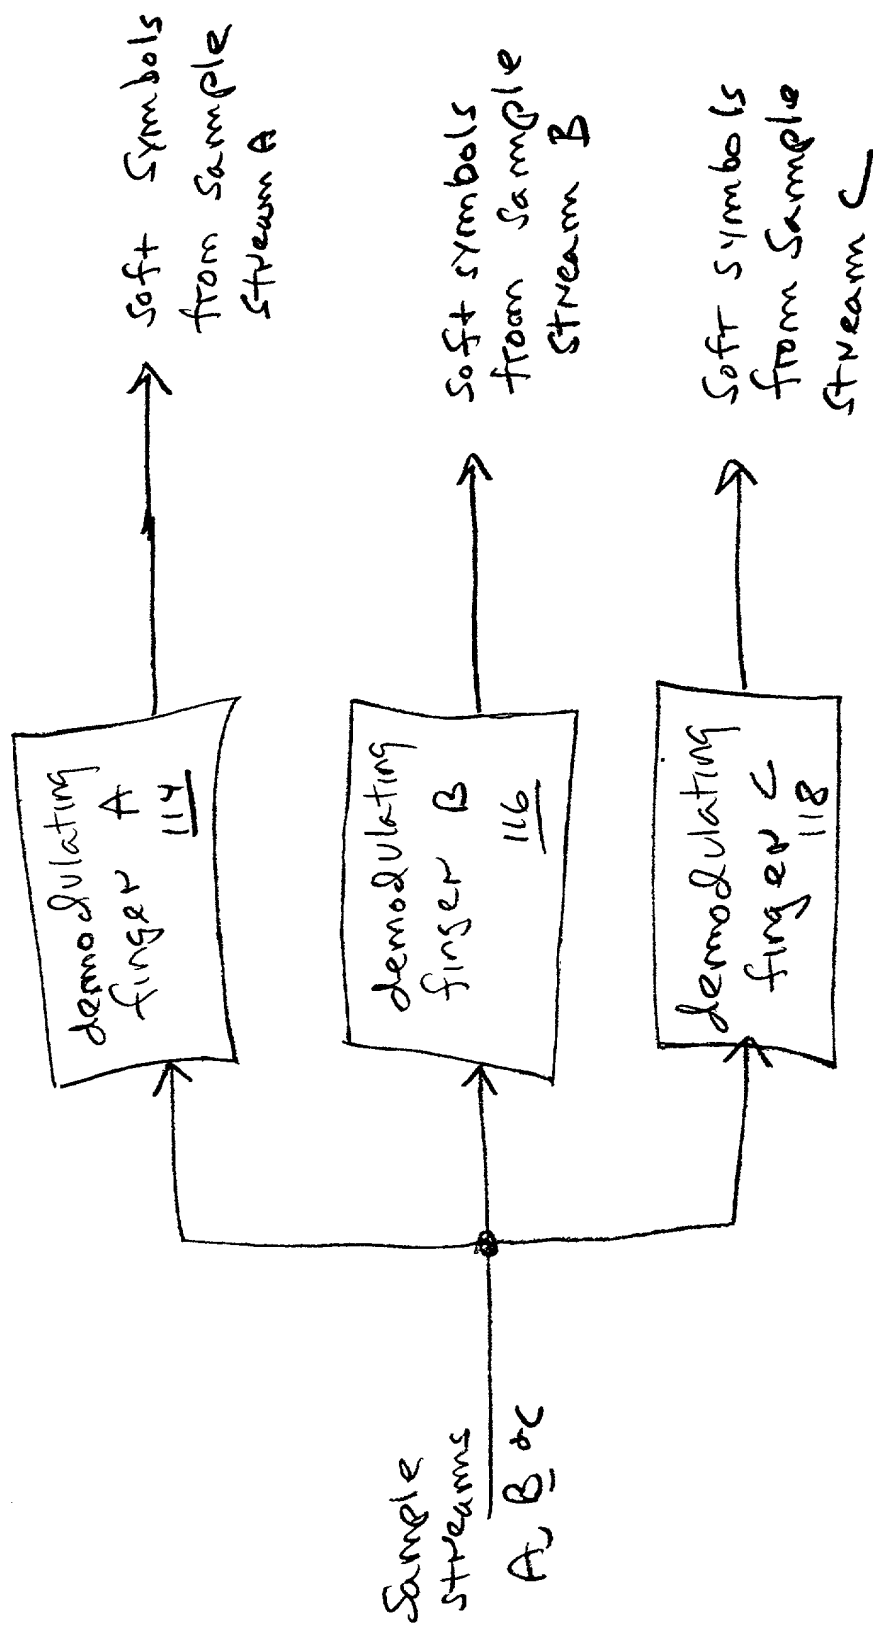


Fig. 7

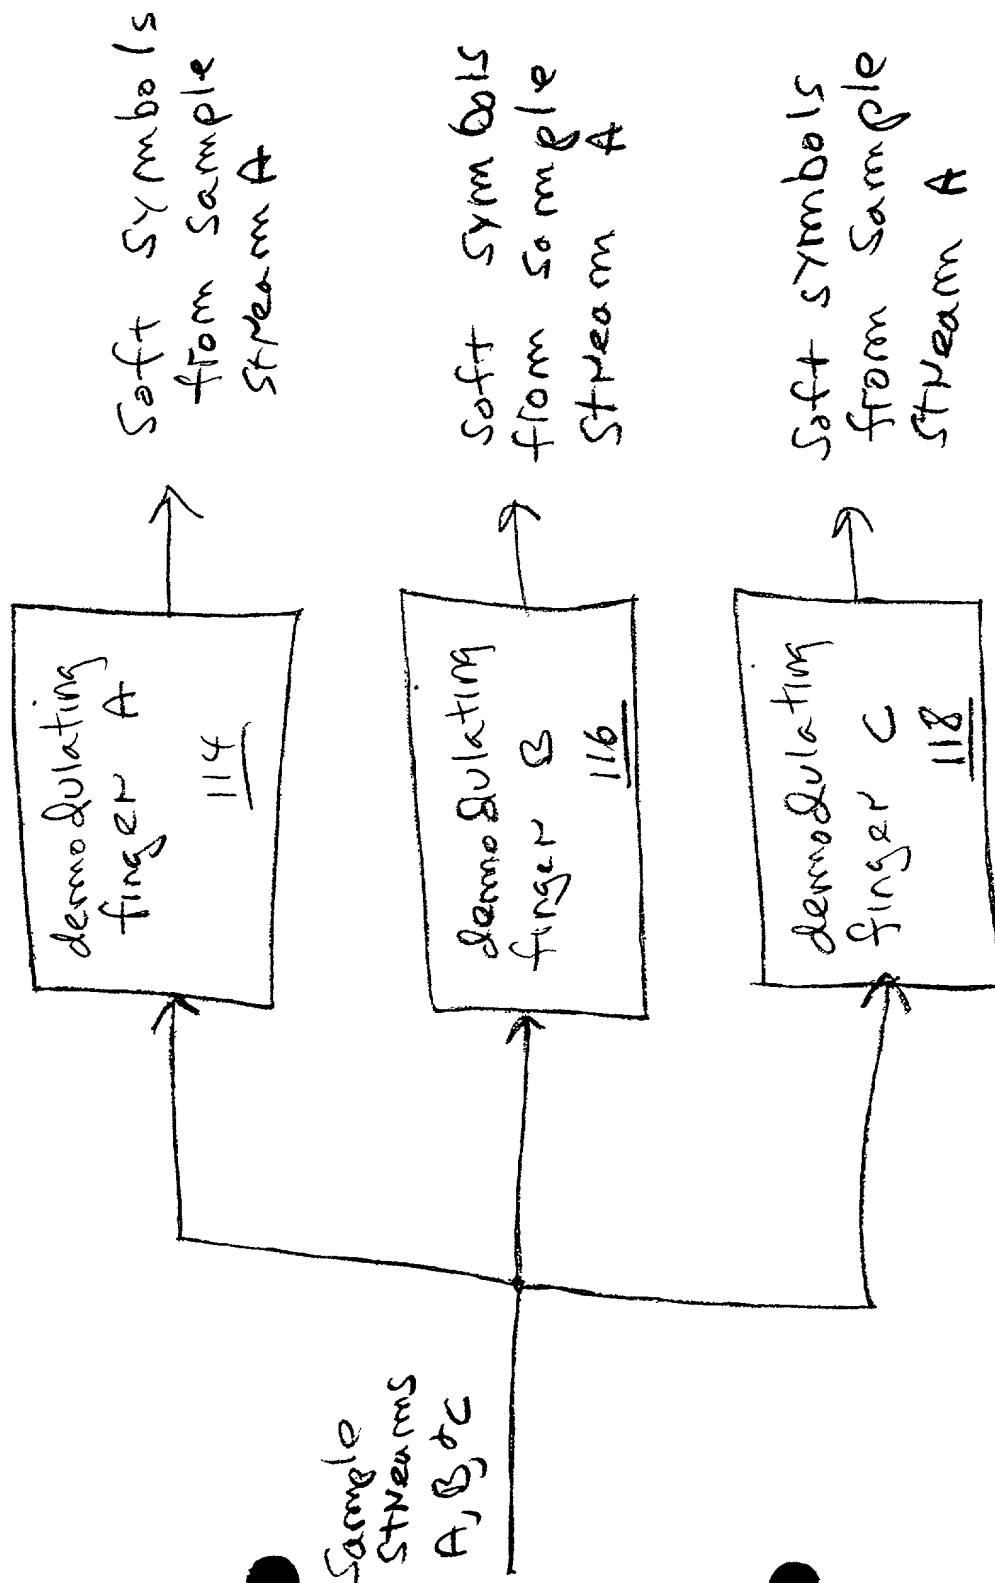


Fig. 8

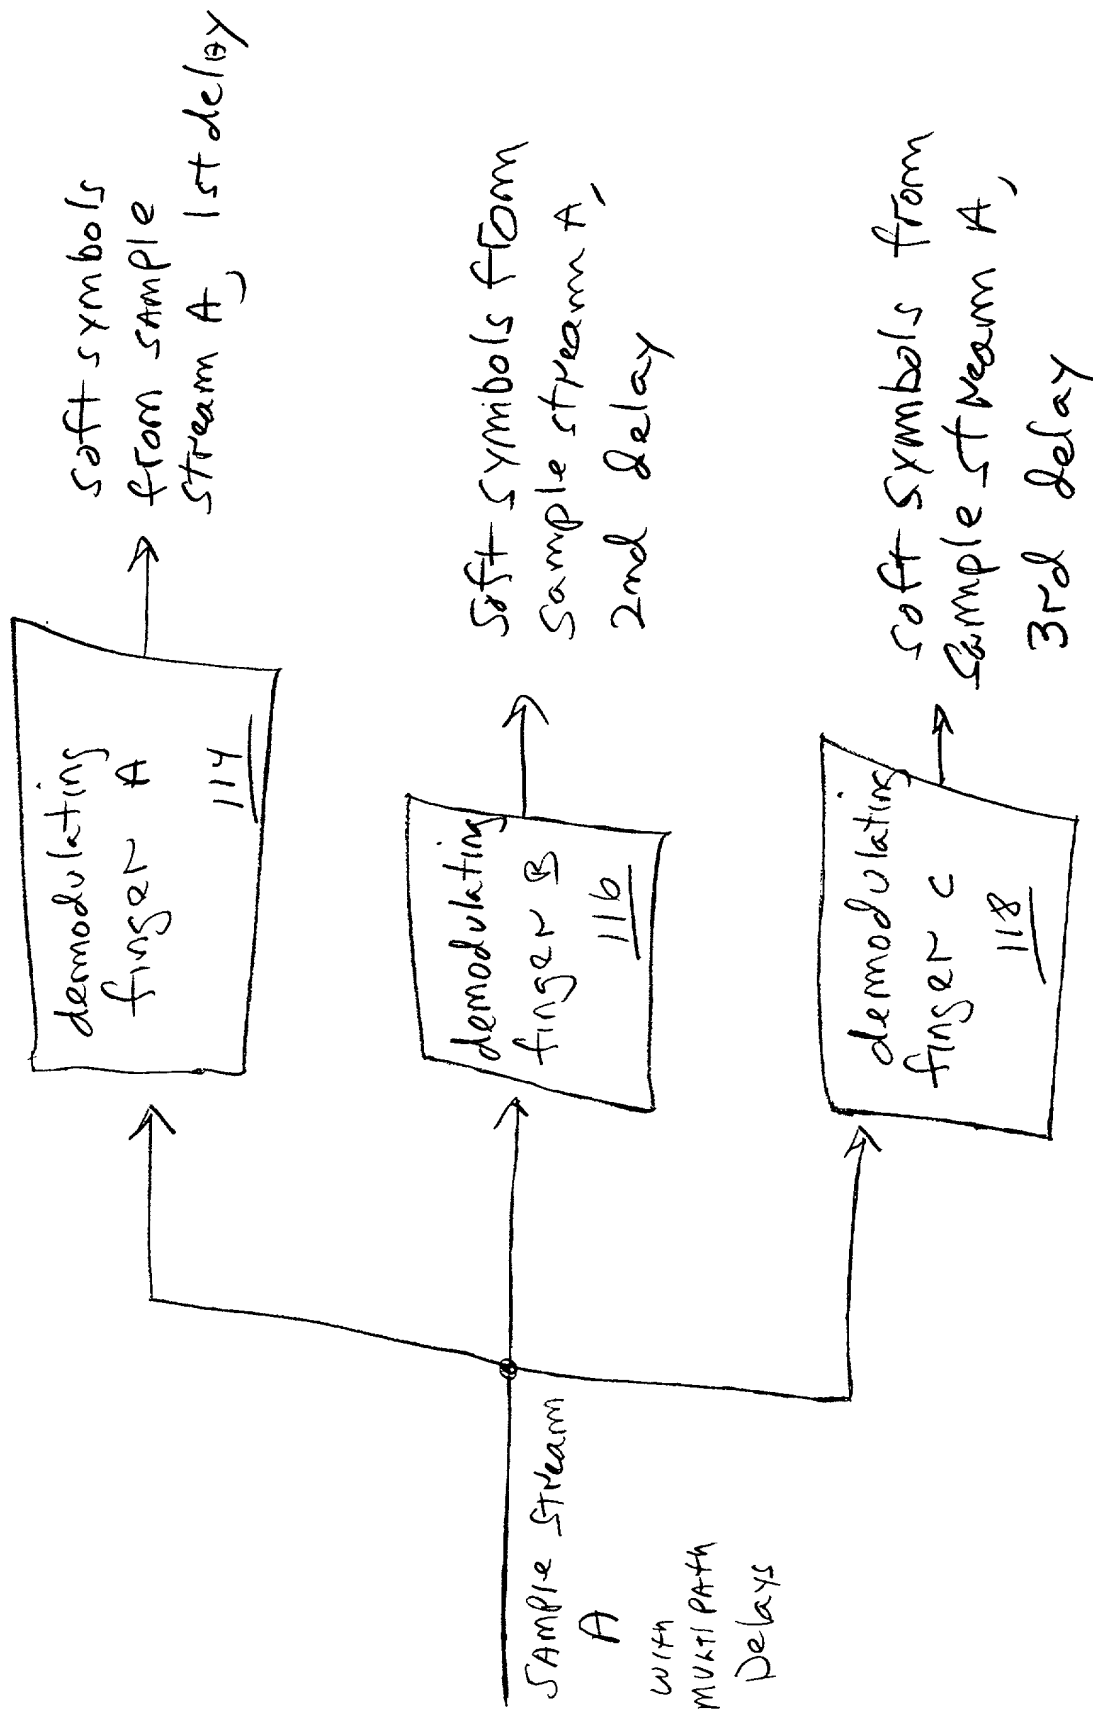


Fig. 9

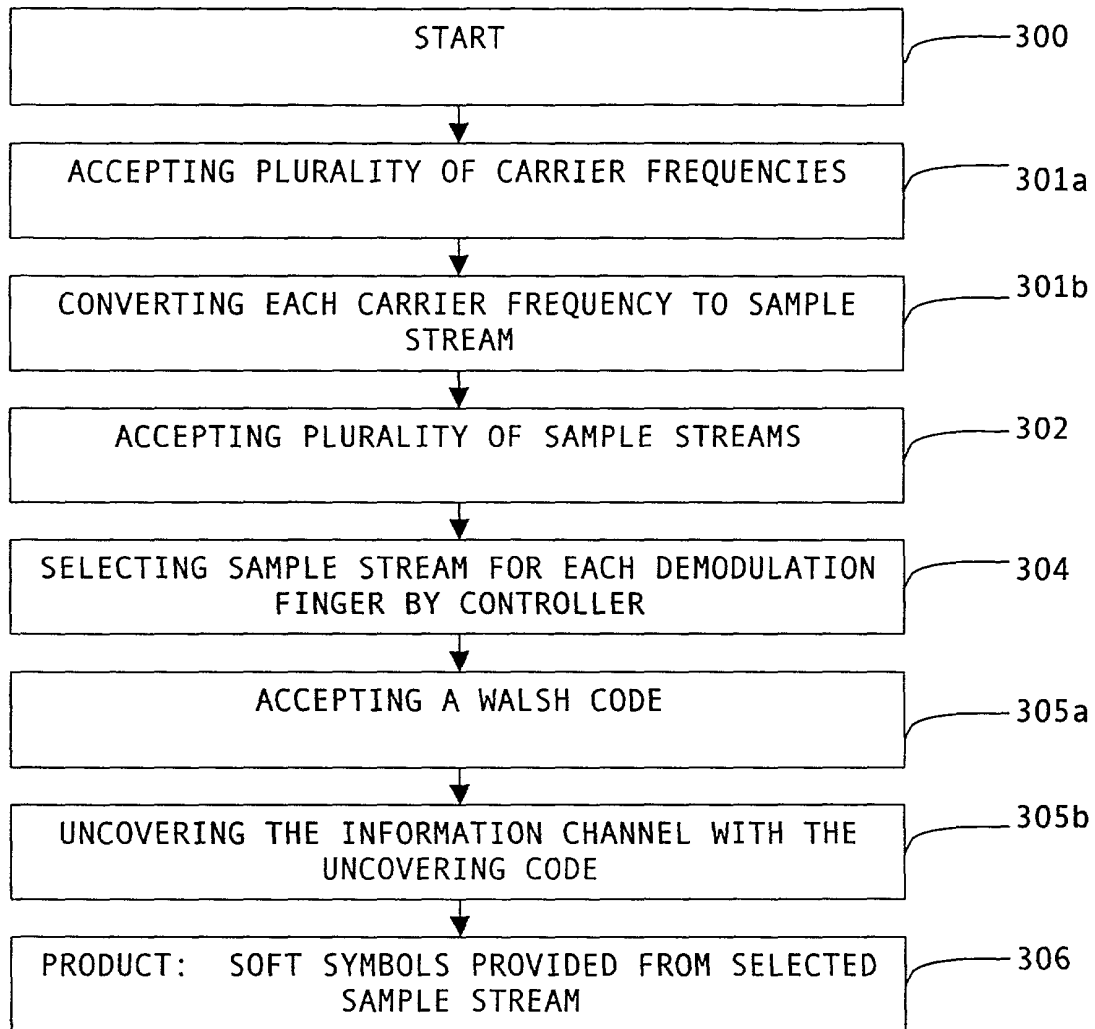



FIG. 10

APPLICATION FOR UNITED STATES PATENT

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor if only one name is listed below, or an original, first and joint inventor if plural inventors are named below, of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, which is described in the attached specification; that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration; that no application for patent or inventor's certificate on this invention has been filed by me or my legal representatives or assigns in any country foreign to the United States of America; and that I acknowledge my duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, section 1.56.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

TITLE OF INVENTION: SYSTEM AND METHOD FOR SELECTING SAMPLE STREAMS IN DIRECT SEQUENCE SPREAD SPECTRUM COMMUNICATIONS		
POWER OF ATTORNEY: I HEREBY APPOINT THE FOLLOWING ATTORNEYS TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH: <div style="text-align: right; margin-top: 10px;"> Ronald O. Neerings, Reg. No. 34,227 Wade J. Brady, III, Reg. No. 32,080 Jay Cantor, Reg. No. 19,906 Robby T. Holland, Reg. No. 33,304 William B. Kempler, Reg. No. 28,228 Frederick J. Telecky, Jr., Reg. No. 29,979 </div>		
SEND CORRESPONDENCE TO: <i>RONALD O. NEERINGS</i> Texas Instruments Incorporated P. O. Box 655474, M.S. 3999 Dallas, Texas 75265		DIRECT TELEPHONE CALLS TO: <i>Ronald O. Neerings</i> (972) 917-5299
NAME OF INVENTOR: (1) John G. McDonough	NAME OF INVENTOR: (2)	NAME OF INVENTOR: (3)
RESIDENCE (City and State Only) La Jolla, California	RESIDENCE (City and State Only)	RESIDENCE (City and State Only)
POST OFFICE ADDRESS 7873 Via Capri La Jolla, CA 92037	POST OFFICE ADDRESS	POST OFFICE ADDRESS
COUNTRY OF CITIZENSHIP: US	COUNTRY OF CITIZENSHIP:	COUNTRY OF CITIZENSHIP:
SIGNATURE OF INVENTOR: 	SIGNATURE OF INVENTOR:	SIGNATURE OF INVENTOR:
DATE: 10/5/00	DATE:	DATE: